


COMBINATION END CURB VALVES

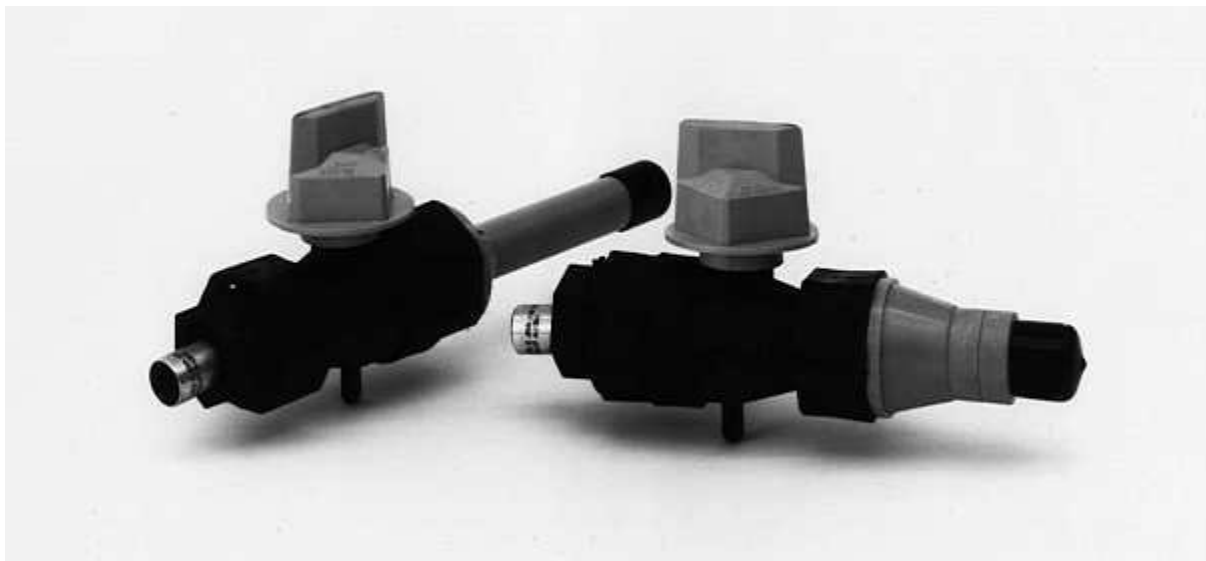

- Mix any connection in the Handley valve product line, such as one side fusion and one side compression, or mix connection sizes such as one side 1" and one side 1/2".
- Our unique mechanical squeezing enables all valve seals to fully compress insuring superior sealing.
- All valve parts are made of DuPont 80G33 Supertough Glass reinforced Nylon™, except the turning head which does not have glass reinforcement. Expansion and contraction rates of the various parts, due to temperature change will be similar. The Supertough additive provides high-impact even at cold temperatures.
- All seals are made of Buna N (the best for natural gas) and coated with grease for maximum lubrication and protection.
- This valve may also be used as a sewer valve. But, only in a pressure sewer installation.
- This valve may also be used as a water valve. But, only in an installation that is using black 3408 pipe non-drinking, non-potable water lines.
- The ball valve features a .965 port opening.
- A 90° shutoff is standard. However, a 360° is also available.
- No cathodic protection is required for this valve.
- Can be used as a reducer valve.
- Every valve manufactured at Handley Industries is tested to ANSI B16.40 paragraphs 3.2.1 (shell test), 3.2.2 (seat test), and 3.3.1 (operating test) prior to shipment. For other test documentation, call the factory for a test data packet.
- Available in sizes 1/2" CTS thru 1 1/4" IPS.
- Meets or exceeds ANSI B16.40 standards.

HOW TO ORDER COMBINATION END CURB VALVES

Choose from the following categories to build the combination end valve best suited to your personal needs. Many options are available so please look this over closely, we don't want you to miss a thing!

ONE = CONNECTION TYPE C = Compression U = Universal D = Dual Socket M = 1 Piece Single Socket S = 2 Piece Single Socket	TWO = PIPE SIZE 1 = ½" 2 = ¾" 3 = 1" 4 = 1¼"	THREE = PIPE SPECIFICATION C = CTS (Copper Tube Size) I = IPS (Iron Pipe Size)
FOUR = PIPE WALL THICKNESS (Applies to Codes C & U from GROUP ONE) 01 = .090 04 = .119 07 = .166 02 = .095 05 = .121 03 = .099/.103 06 = .151		FIVE = MATERIAL DESIGNATION (Does not apply to Compression ends.) B = Yellow 2406 C = Black 3408
SIX = REPEAT GROUPS 1-5 FOR THE SECOND SIDE OF YOUR COMBINATION VALVE		
SEVEN = OTHER OPTIONS (Note the following code if the option is desired:) J = 360° Turning Head X = Valves Assembled to a VC1		

FOR OTHER OPTIONS OF VARIATIONS, PLEASE CONSULT THE FACTORY.

