

HANDLEY VALVE BOXES**Price Table:**

Often more than one **HANDLEY** Valve Box will satisfy your requirements. The following table reflects the price position for similarly equipped valve boxes.

4" 'C'	4" with a 6" Bell	4" 'T'	6" 'C'	6" with a 6" Bell 'S'	6" 'T'	6" with a 9" Bell 'B'	Bell Plate Models	6" with a 12" Bell 'X'
--------	----------------------	--------	--------	--------------------------	--------	--------------------------	-------------------	---------------------------

Valve and Valve Box Compatibility:

To locate the valve boxes that are compatible with your valves please consult the support section.



'C' Model Multi-Boxes 4 Inch and 6 Inch with a 6 Inch Bell

'T' Model Multi-Boxes 4 Inch and 6 Inch with a 10½ Inch Bell

Multi-Box Parts and Accessories



4 Inch Valve Box with a 6 Inch Bell

4 Inch Valve Box with a 6 Inch Bell, Parts and Accessories



6 Inch Valve Box with a 6 Inch Bell 'S'

6 Inch Valve Box with a 9 Inch Bell 'B'

6 Inch Valve Box with a 12 Inch Bell 'X'

6 Inch Valve Box Parts and Accessories

HANDLEY INDUSTRIES, INC.



Bell Plate Valve Boxes 4 Inch with a 6 Inch Bell or 6 Inch with a 6 Inch or 9 Inch Bell

Bell Plate Valve Box Parts and Accessories



'C' MODEL MULTI-BOX

- The slip-type design protects the service from downward pressure. The box absorbs the pressure from above.
- Meets DOT requirement 192.181; "If the valve is installed in a buried box, the box must be installed so as to avoid transmitting external loads to the main."
- Easily adjusts to grade level. No need to dig when grade changes, just step-on it to push down, or pry it up.
- A full throat/unobstructed upper tube, allows more room to operate the key.
- Made from SUPERIOR GRADE ABS plastic. It's long lasting and won't rust, rot or corrode.
- Light weight and easy to handle.
- 4 or 6" I.D. upper tube with a 6⁵/₈" x 6³/₈" bell.
- Fits a variety of plastic valves up to 3". The closed bell gives flexibility for use on many steel valves.
- Molded with 2⁵/₈", 3³/₈" and 5¹/₈" cut away arches for use with any compatible valve.
- Use with any compatible Handley valve support for the ideal installation.
- Single or multi-slotting is available for use with compatible Handley valve supports.
- 1¹/₂" cast iron flange is standard for off-road installations.
- 5" cast iron heavy-duty flange is available for in road installations.
- Choose from locking or drop-in lids marked GAS, WATER, or SEWER.
- Lids are available with or without vent holes.
- 1¹/₂" stackable risers, that utilize the same lid, are available when the road is repaved.
- Extensions available.
- Tracer wire holes can be provided upon request.
- Customized lids are available for an additional charge.



This page is intentionally blank to accommodate dual sided printing.



HANDLEY INDUSTRIES, INC.

**HOW TO ORDER SUPERIOR GRADE 'C' MODEL
MULTI-BOXES**

Choose from the following categories to build the valve box best suited to your personal needs. Many options are available so please look this over closely, we don't want you to miss a thing!

ONE = LID LETTERING G = Gas S = Sewer W = Water	TWO = BOX SIZE 4 = 4" 6 = 6"	THREE = BOX TYPE V = Valve Box H = Heavy Duty Box	FOUR = ARCH A = Yes N = No		
FIVE = LOWER TUBE DESIGN C = 'C' Model Multi-Box					
SIX = ADJUSTABLE RANGE (Measured from top of the box to the bottom of the box. Make your selection from the group that matches your Box Type for Category Three.) <table data-bbox="186 1029 1437 1186" style="width: 100%; border: none;"> <tr> <td style="width: 50%; vertical-align: top;"> VALVE BOXES 2 = 24" - 30" 3 = 29" - 42" 4 = 37" - 54" 5 = 41" - 66" </td> <td style="width: 50%; vertical-align: top;"> HEAVY DUTY BOXES 2 = 26" - 32" 3 = 31" - 44" 4 = 39" - 56" 5 = 43" - 68" </td> </tr> </table>				VALVE BOXES 2 = 24" - 30" 3 = 29" - 42" 4 = 37" - 54" 5 = 41" - 66"	HEAVY DUTY BOXES 2 = 26" - 32" 3 = 31" - 44" 4 = 39" - 56" 5 = 43" - 68"
VALVE BOXES 2 = 24" - 30" 3 = 29" - 42" 4 = 37" - 54" 5 = 41" - 66"	HEAVY DUTY BOXES 2 = 26" - 32" 3 = 31" - 44" 4 = 39" - 56" 5 = 43" - 68"				
SEVEN = LID TYPE (Locking Lid is Standard) N = Non-Locking					



EIGHT = SUPPORT SYSTEM MODIFICATION

If you are using a support with your Valve Box, one of the codes below is required:

Consult the **HANDLEY VALVE AND BOX SUPPORT** page for additional options or if you require a **BELL PLATE VALVE BOX** please, refer to that page.

CODES VALVE APPLICATION

- 05 = 2" Full-Port Kerotest Polyball Valve
- 05 = 2" Full-Port Lyall-Polytec Ball Valve
- 05 = 2" Full-Port Nordstrom Poly Ball Valve
- 05 = 3" Reduced-Port Kerotest Polyball Valve
- 05 = 3" Reduced-Port Nordstrom Poly Ball Valve
- 05 = 3" Standard-Port Lyall-Polytec Ball Valve
- 06 = 3" Full-Port Kerotest Polyball Valve
- 06 = 3" Full-Port Lyall-Polytec Ball Valve
- 06 = 3" Full-Port Nordstrom Poly Ball Valve
- 06 = 4" Reduced-Port Kerotest Polyball Valve
- 06 = 4" Reduced-Port Nordstrom Poly Ball Valve
- 06 = 4" Standard-Port Lyall-Polytec Ball Valve
- 08 = 2", 3" Kerotest Poly Butterfly Valves
- 11 = 2" Dresser GTO-Coated & Uncoated Valve
- 24 = 2" Reduced-Port Nordstrom Poly II Ball Valve
- 26 = 2" Handley Plastic Ball Valve
- 33 = 2" Perfection Modified Poly Ball Valve (new) - (see VV25)
- 41 = 1 ¼", 1 ½" Full-Port Kerotest Polyball Valves
- 41 = 2" Reduced-Port Kerotest Polyball Valve
- 42 = 2" Balon Steel Valve

NINE = LID**COLOR**

(Silver is Standard)

A = Yellow

B = Blue

J = Black

TEN = VENT HOLE

C = One 3/8" Vent

Hole

ELEVEN = MAGNET

(One Magnet Located in the Flange is Standard)

D = No Magnet (Heavy Duty Boxes are not supplied with a magnet.)

FOR OTHER OPTIONS OR VARIATIONS, PLEASE CONSULT THE FACTORY.



HANDLEY INDUSTRIES, INC.

'T' MODEL MULTI-BOX

- The slip-type design protects the service from downward pressure. The box absorbs the pressure from above.
- Meets DOT requirement 192.181; "If the valve is installed in a buried box, the box must be installed so as to avoid transmitting external loads to the main."
- Easily adjusts to grade level. No need to dig when grade changes, just step-on it to push down, or pry it up.
- A full throat/unobstructed upper tube, allows more room to operate the key.
- Made from SUPERIOR GRADE ABS plastic. It's long lasting and won't rust, rot or corrode.
- Light weight and easy to handle.
- 4 or 6" I.D. upper tube with a 10⁵/₈" x 10¹/₂" bell.
- Fits a variety of plastic valves up to 6". The closed bell gives flexibility for use on many steel valves.
- Molded with 3³/₈", 5⁵/₈" and 7³/₄" cut away arches for use with any compatible valve.
- Use with any compatible Handley valve support for the ideal installation.
- Single or multi-slotting is available for use with compatible Handley valve supports.
- 1¹/₂" cast iron flange is standard for off-road installations.
- 5" cast iron heavy-duty flange is available for in road installations.
- Choose from locking or drop-in lids marked GAS, WATER, or SEWER.
- Lids are available with or without vent holes.
- 1¹/₂" stackable risers, that utilize the same lid, are available when the road is repaved.
- Extensions available.
- Tracer wire holes can be provided upon request.
- Customized lids are available for an additional charge.



This page is intentionally blank to accommodate dual sided printing.



HANDLEY INDUSTRIES, INC.

**HOW TO ORDER SUPERIOR GRADE 'T' MODEL
MULTI-BOXES**

Choose from the following categories to build the valve box best suited to your personal needs. Many options are available so please look this over closely, we don't want you to miss a thing!

ONE = LID LETTERING G = Gas S = Sewer W = Water	TWO = BOX SIZE 4 = 4" 6 = 6"	THREE = BOX TYPE V = Valve Box H = Heavy Duty Box	FOUR = ARCH A = Yes N = No
FIVE = LOWER TUBE DESIGN T = 'T' Model Multi-Box			
SIX = ADJUSTABLE RANGE (Measured from top of the box to the bottom of the box. Make your selection from the group that matches your Box Type for Category Three.)			
VALVE BOXES 2 = 24" - 30" 3 = 29" - 42" 4 = 37" - 54" 5 = 41" - 66"		HEAVY DUTY BOXES 2 = 26" - 32" 3 = 31" - 44" 4 = 39" - 56" 5 = 43" - 68"	
SEVEN = LID TYPE (Locking Lid is Standard) N = Non-Locking			



EIGHT = SUPPORT SYSTEM MODIFICATION

If you are using a support with your Valve Box, one of the codes below is required:

Consult the **HANDLEY VALVE AND BOX SUPPORT** page for additional options or if you require a **BELL PLATE VALVE BOX** please, refer to that page. (BPA = Bell Plate Available)

CODES VALVE APPLICATION

- 17 = 4" Full-Port Kerotest Polyball Valve - (BPA)
- 17 = 4" Full-Port Lyall-Polytec Ball Valve - (BPA)
- 17 = 4" Full-Port Nordstrom Poly Ball Valve - (BPA)
- 17 = 6" Reduced-Port Kerotest Polyball Valve - (BPA)
- 17 = 6" Reduced-Port Nordstrom Poly Ball Valve - (BPA)
- 17 = 6" Standard-Port Lyall-Polytec Ball Valve - (BPA)
- 19 = 2" Kerotest Poly Plug Valve
- 20 = 4" Kerotest Poly Plug Valve
- 25 = 2" Perfection Plug Valve (old) - (see VV33)
- 27 = 4x3" Full-Port Perfection Ball Valve - (BPA)
- 27 = 4x4" Full-Port Perfection Ball Valve - (BPA)
- 27 = 4x6" Reduced-Port Perfection Ball Valve - (BPA)
- 28 = 3" Kerotest Poly Plug Valve
- 29 = 2" Frialen-Friatec Poly Ball Valve
- 30 = 3", 4" Frialen-Friatec Poly Ball Valves

NINE = LID**COLOR**

(Silver is Standard)

A = Yellow

B = Blue

J = Black

TEN = VENT HOLE

C = One 3/8" Vent

Hole

ELEVEN = MAGNET

(One Magnet Located in the Flange is Standard)

D = No Magnet (Heavy Duty Boxes are not supplied with a magnet.)

FOR OTHER OPTIONS OR VARIATIONS, PLEASE CONSULT THE FACTORY.



HANDLEY INDUSTRIES, INC.

HOW TO ORDER SUPERIOR GRADE MULTI-BOX PARTS AND ACCESSORIES

PENTAGON WRENCH = PW

RISERS = RAISES BOX 1½" - STACKABLE

RIG4 (Compatible with All 4" Valve Boxes)

RIG6 (Used on 6" Heavy Duty Locking Lid)

RIG6N (Used on 6" Heavy Duty Non-Locking Lid)

EXTENSIONS = XTG & One Code from the Following Categories:

ONE = SIZE

4 = 4"

6 = 6"

TWO = LENGTH

AL = 18"

BL = 35 ⅝" (Not Valid with XTG6)

REPLACEMENT LIDS = LI & One Code from the Following Categories:

ONE = LETTERING

G = Gas

S = Sewer

W = Water

D = Drip

TWO = SIZE

4 = 4"

6 = 6"

THREE = BOX TYPE

(Omit Code on 4" Box Size)

H = Heavy Duty

V = Valve Box

FOUR = LID TYPE

(Locking is Standard)

N = Non-Locking

FIVE = COLOR

(Silver is Standard)

A = Yellow

B = Blue

J = Black

SIX = VENT HOLE

C = One 3/8" Vent Hole

REPLACEMENT UPPER TUBES

4" Models Begin with UTG4 & One Code from the Following Categories:

6" Models Begin with UTG6 & One Code from the Following Categories:

ONE = BOX TYPE

V = Valve Box

H = Heavy Duty

TWO = BELL DESIGN

(Omit Code on 6" Box Size)

C = 'C' Model Multi-Box

T = 'T' Model Multi-Box

THREE = LENGTH

A = 10" (2' Box)

B = 17½" (3' Box)

C = 21½" (4' Box)

D = 29½" (5' Box)

FOUR = FLANGE

(Omit Code on UL

and 4" Box Size)

(Locking is Standard)

N = Non-Locking

FIVE = MAGNET

(One Magnet Located in the Flange is Standard)

D = No Magnet

(Heavy Duty Boxes are not supplied with a magnet.)

REPLACEMENT UPPER TUBE & LID ASSEMBLIES - All assemblies begin with UL. Repeat all the steps beginning with Category One for [REPLACEMENT LIDS](#) and [REPLACEMENT UPPER TUBES](#).

REPLACEMENT LOWER TUBES = LTG & One Code from the Following Categories:

ONE = BOX SIZE

4 = 4"

6 = 6"

TWO = ARCH

A = Yes

N = No

THREE = BELL DESIGN

C = 'C' Model Multi-Box

T = 'T' Model Multi-Box

FOUR = LENGTH

A = 22⅝" (2' Box)

B = 27⅞" (3' Box)

C = 35⅞" (4' Box)

D = 39⅞" (5' Box)



FIVE = SUPPORT SYSTEM MODIFICATION

If you are using a support with your Valve Box, one of the codes below is required:

Consult the **HANDLEY VALVE AND BOX SUPPORT** page for additional options or if you require a **BELL PLATE VALVE BOX** please, refer to that page. (BPA = Bell Plate Available)

CODES	VALVE APPLICATION	BELL DESIGN
05 =	2" Full-Port Kerotest Polyball Valve	C & T
05 =	2" Full-Port Lyall-Polytec Ball Valve	C & T
05 =	2" Full-Port Nordstrom Poly Ball Valve	C & T
05 =	3" Reduced-Port Kerotest Polyball Valve	C & T
05 =	3" Reduced-Port Nordstrom Poly Ball Valve	C & T
05 =	3" Standard-Port Lyall-Polytec Ball Valve	C & T
06 =	3" Full-Port Kerotest Polyball Valve	C & T
06 =	3" Full-Port Lyall-Polytec Ball Valve	C & T
06 =	3" Full-Port Nordstrom Poly Ball Valve	C & T
06 =	4" Reduced-Port Kerotest Polyball Valve	C & T
06 =	4" Reduced-Port Nordstrom Poly Ball Valve	C & T
06 =	4" Standard-Port Lyall-Polytec Ball Valve	C & T
08 =	2", 3" Kerotest Poly Butterfly Valves	C & T
11 =	2" Dresser GTO-Coated & Uncoated Valve	C & T
17 =	4" Full-Port Kerotest Polyball Valve - (BPA)	T Only
17 =	4" Full-Port Lyall-Polytec Ball Valve - (BPA)	T Only
17 =	4" Full-Port Nordstrom Poly Ball Valve - (BPA)	T Only
17 =	6" Reduced-Port Kerotest Polyball Valve - (BPA)	T Only
17 =	6" Reduced-Port Nordstrom Poly Ball Valve - (BPA)	T Only
17 =	6" Standard-Port Lyall-Polytec Ball Valve - (BPA)	T Only
19 =	2" Kerotest Poly Plug Valve	T Only
20 =	4" Kerotest Poly Plug Valve	T Only
24 =	2" Reduced-Port Nordstrom Poly II Ball Valve	C & T
25 =	2" Perfection Plug Valve (old) - (see VV33)	T Only
26 =	2" Handley Plastic Ball Valve	C & T
27 =	4x3" Full-Port Perfection Ball Valve - (BPA)	T Only
27 =	4x4" Full-Port Perfection Ball Valve - (BPA)	T Only
27 =	4x6" Reduced-Port Perfection Ball Valve - (BPA)	T Only
28 =	3" Kerotest Poly Plug Valve	T Only
29 =	2" Frialen-Friatec Poly Ball Valve	T Only
30 =	3", 4" Frialen-Friatec Poly Ball Valves	T Only
33 =	2" Perfection Modified Poly Ball Valve (new) - (see VV25)	C & T
41 =	1 ¼", 1 ½" Full-Port Kerotest Polyball Valves	C & T
41 =	2" Reduced-Port Kerotest Polyball Valve	C & T
42 =	2" Balon Steel Valve	C & T

FOR OTHER OPTIONS OR VARIATIONS, PLEASE CONSULT THE FACTORY.



4 INCH VALVE BOX WITH A 6 INCH BELL

- The slip-type design protects the service from downward pressure. The box absorbs the pressure from above. If all the downward adjustment is used and additional pressure causes the box to collapse further, the bell area will collapse before damaging the pipe. This is a SAFE installation.
- Meets DOT requirement 192.181; "If the valve is installed in a buried box, the box must be installed so as to avoid transmitting external loads to the main."
- Easily adjusts to grade level. No need to dig when grade changes. Just step-on it to push down or pry it up.
- A full throat/unobstructed upper tube, allows more room to operate the key.
- Made from SUPERIOR GRADE ABS plastic. It's long lasting and won't rust, rot or corrode.
- The box has a 4" upper tube and a 6" bell area.
- Fits up to 2" plastic valves. The closed bell gives flexibility for use on many steel valves.
- Use with any compatible Handley valve support for the ideal installation.
- 1 ½" cast iron flange standard for off-road installations.
- 5" cast iron heavy duty flange is standard for in-road installations.
- Choose from locking or drop-in lids marked GAS, WATER, SEWER, TEST, available with or without vent holes.
- Locking lids are one piece, no parts to be lost.
- 1½" stackable risers, that utilize the same lid, are available when the road is repaved.
- Extensions are available.
- Tracer wire holes can be provided upon request.
- Customized lids are available for an additional charge.
- Use with a Handley valve support for the ideal installation.



This page is intentionally blank to accommodate dual sided printing.



HOW TO ORDER SUPERIOR GRADE 4" VALVE BOXES WITH A 6" BELL

Choose from the following categories to build the valve box best suited to your personal needs. Many options are available so please look this over closely, we don't want you to miss a thing!

ONE = LID LETTERING G = Gas S = Sewer W = Water	TWO = BOX SIZE 4 = 4"	THREE = BOX TYPE V = Valve Box H = Heavy Duty Box	FOUR = ARCH A = Yes N = No
FIVE = ADJUSTABLE RANGE (Measured from top of the box to the bottom of the box. Make your selection from the group that matches your Box Type for Category Three.)			
VALVE BOXES 2 = 24" - 30" 3 = 30" - 42" 4 = 42" - 54" 5 = 54" - 66"		HEAVY DUTY BOXES 2 = 26" - 32" 3 = 32" - 44" 4 = 44" - 56" 5 = 56" - 68"	
SIX = LID TYPE (Locking Lid is Standard) N = Non-Locking			



SEVEN = SUPPORT SYSTEM MODIFICATION

If you are using a support with your Valve Box, one of the codes below is required:

Consult the **HANDLEY VALVE AND BOX SUPPORT** page for additional options or if you require a **BELL PLATE VALVE BOX** please, refer to that page.

CODES VALVE APPLICATION

- 05 = 2" Full-Port Kerotest Polyball Valve
- 05 = 2" Full-Port Lyall-Polytec Ball Valve
- 05 = 2" Full-Port Nordstrom Poly Ball Valve
- 05 = 3" Reduced-Port Kerotest Polyball Valve
- 05 = 3" Reduced-Port Nordstrom Poly Ball Valve
- 05 = 3" Standard-Port Lyall-Polytec Ball Valve
- 08 = 2", 3" Kerotest Poly Butterfly Valves
- 11 = 2" Dresser GTO-Coated & Uncoated Valve
- 24 = 2" Reduced-Port Nordstrom Poly II Ball Valve
- 26 = 2" Handley Plastic Ball Valve
- 33 = 2" Perfection Modified Poly Ball Valve (new) - (see VV25)
- 41 = 1 ¼", 1 ½" Full-Port Kerotest Polyball Valves
- 41 = 2" Reduced-Port Kerotest Polyball Valve
- 42 = 2" Balon Steel Valve

EIGHT = LID COLOR

(Silver is Standard)

A = Yellow

B = Blue

J = Black

NINE = VENT HOLE

C = One 3/8" Vent Hole

TEN = MAGNET

(One Magnet Located in the Flange is Standard)

D = No Magnet (Heavy Duty Boxes are not supplied with a magnet.)

FOR OTHER OPTIONS OR VARIATIONS, PLEASE CONSULT THE FACTORY.



HOW TO ORDER SUPERIOR GRADE 4" VALVE BOXES WITH A 6" BELL PARTS AND ACCESSORIES

<u>PENTAGON WRENCH</u> = PW	<u>EXTENSIONS</u> = XTG4 & One Code AL = 18" BL = 35 $\frac{5}{8}$ "	<u>RISERS</u> = RIG4 (Raises Box 1 $\frac{1}{2}$ ", Stackable & Compatible with All 4" Valve Boxes)
------------------------------------	---	---

REPLACEMENT LIDS = LI & One Code from the Following Categories:

ONE = LETTERING G = Gas S = Sewer W = Water	TWO = SIZE 4 = 4"	THREE = LID TYPE (Locking is Standard) N = Non-Locking	FOUR = COLOR (Silver is Standard) A = Yellow B = Blue J = Black	FIVE = VENT HOLE C = One 3/8" Vent Hole
---	-----------------------------	---	--	---

REPLACEMENT UPPER TUBES = UTG4 & One Code from the Following Categories:

ONE = BOX TYPE V = Valve Box H = Heavy Duty	TWO = LENGTH A = 12" (2' Box) B = 17 $\frac{1}{2}$ " (3' Box) C = 29 $\frac{1}{2}$ " (4' Box) D = 42" (5' Box)	THREE = MAGNET (One Magnet Located in the Flange is Standard) D = No Magnet (Heavy Duty Boxes are not supplied with a magnet.)
--	---	--

REPLACEMENT UPPER TUBE & LID ASSEMBLIES All assemblies begin with UL. Repeat all the steps beginning with Group One for [REPLACEMENT LIDS](#) and [REPLACEMENT UPPER TUBES](#).

REPLACEMENT LOWER TUBES = LTG4 & One Code from the Following Categories:

ONE = ARCH A = Yes N = No	TWO = LENGTH A = 27 $\frac{1}{8}$ " (3', 4', 5' Box) B = 20 $\frac{3}{4}$ " (2' Box)
--	---

THREE = SUPPORT SYSTEM MODIFICATION & VALVE APPLICATION CODES

CODES	VALVE APPLICATION
05	= 2" Full-Port Kerotest Polyball Valve
05	= 2" Full-Port Lyall-Polytec Ball Valve
05	= 2" Full-Port Nordstrom Poly Ball Valve
05	= 3" Reduced-Port Kerotest Polyball Valve
05	= 3" Reduced-Port Nordstrom Poly Ball Valve
05	= 3" Standard-Port Lyall-Polytec Ball Valve
08	= 2", 3" Kerotest Poly Butterfly Valves
11	= 2" Dresser GTO-Coated & Uncoated Valve
24	= 2" Reduced-Port Nordstrom Poly II Ball Valve
26	= 2" Handley Plastic Ball Valve
33	= 2" Perfection Modified Poly Ball Valve (new) - (see VV25)
41	= 1 $\frac{1}{4}$ ", 1 $\frac{1}{2}$ " Full-Port Kerotest Polyball Valves
41	= 2" Reduced-Port Kerotest Polyball Valve
42	= 2" Balon Steel Valve

FOR OTHER OPTIONS OR VARIATIONS, PLEASE CONSULT THE FACTORY



This page is intentionally blank to accommodate dual sided printing.



6 INCH VALVE BOX WITH A 6 INCH BELL

- The slip-type design protects the service from downward pressure. The box absorbs the pressure from above.
- Meets DOT requirement 192.181; "If the valve is installed in a buried box, the box must be installed so as to avoid transmitting external loads to the main."
- Easily adjusts to grade level. No need to dig when grade changes, just step-on it to push down, or pry it up.
- A full throat/unobstructed upper tube, allows more room to operate the key.
- Made from SUPERIOR GRADE ABS plastic. It's long lasting and won't rust, rot or corrode.
- Light weight and easy to handle.
- 6" I.D. from top to bell.
- Fits up to 2" plastic valves. The closed bell gives flexibility for use on many steel valves.
- Use with any compatible Handley valve support for the ideal installation.
- 1 ½" cast iron heavy-duty flange is available for in-road installations.
- Choose from locking or drop-in lids marked GAS, WATER, or SEWER.
- Lids are available with or without vent holes.
- 1 ½" stackable risers, that utilize the same lid, are available when the road is repaved.
- Extensions available.
- Tracer wire holes can be provided upon request.
- Customized lids are available for an additional charge.



This page is intentionally blank to accommodate dual sided printing.



HANDLEY INDUSTRIES, INC.

HOW TO ORDER SUPERIOR GRADE 6" VALVE BOXES WITH A 6" BELL

Choose from the following categories to build the valve box best suited to your personal needs. Many options are available so please look this over closely, we don't want you to miss a thing!

ONE = LID LETTERING G = Gas S = Sewer W = Water	TWO = BOX SIZE 6 = 6"	THREE = BOX TYPE V = Valve Box H = Heavy Duty Box	FOUR = ARCH A = Yes N = No		
FIVE = LOWER TUBE DESIGN S = 6" Straight Bell					
SIX = ADJUSTABLE RANGE (Measured from top of the box to the bottom of the box. Make your selection from the group that matches your Box Type for Category Three.) <table border="0" data-bbox="183 978 1435 1167"> <tr> <td data-bbox="183 978 852 1167"> VALVE BOXES 0 = No Adjustable Range 2 = 24" - 30" 3 = 29" - 42" 4 = 37" - 54" 5 = 41" - 66" </td> <td data-bbox="852 978 1435 1167"> HEAVY DUTY BOXES 0 = No Adjustable Range 2 = 26" - 32" 3 = 31" - 44" 4 = 39" - 56" 5 = 43" - 68" </td> </tr> </table>				VALVE BOXES 0 = No Adjustable Range 2 = 24" - 30" 3 = 29" - 42" 4 = 37" - 54" 5 = 41" - 66"	HEAVY DUTY BOXES 0 = No Adjustable Range 2 = 26" - 32" 3 = 31" - 44" 4 = 39" - 56" 5 = 43" - 68"
VALVE BOXES 0 = No Adjustable Range 2 = 24" - 30" 3 = 29" - 42" 4 = 37" - 54" 5 = 41" - 66"	HEAVY DUTY BOXES 0 = No Adjustable Range 2 = 26" - 32" 3 = 31" - 44" 4 = 39" - 56" 5 = 43" - 68"				
SEVEN = LID TYPE (Locking Lid is Standard) N = Non-Locking					



EIGHT = SUPPORT SYSTEM MODIFICATION

If you are using a support with your Valve Box, one of the codes below is required:

Consult the **HANDLEY VALVE AND BOX SUPPORT** page for additional options or if you require a **BELL PLATE VALVE BOX** please, refer to that page.

CODES VALVE APPLICATION

- 05 = 2" Full-Port Kerotest Polyball Valve
- 05 = 2" Full-Port Lyall-Polytec Ball Valve
- 05 = 2" Full-Port Nordstrom Poly Ball Valve
- 05 = 3" Reduced-Port Kerotest Polyball Valve
- 05 = 3" Reduced-Port Nordstrom Poly Ball Valve
- 05 = 3" Standard-Port Lyall-Polytec Ball Valve
- 08 = 2", 3" Kerotest Poly Butterfly Valves
- 11 = 2" Dresser GTO-Coated & Uncoated Valve
- 24 = 2" Reduced-Port Nordstrom Poly II Ball Valve
- 26 = 2" Handley Plastic Ball Valve
- 33 = 2" Perfection Modified Poly Ball Valve (new) - (see VV25)
- 41 = 1 ¼", 1 ½" Full-Port Kerotest Polyball Valves
- 41 = 2" Reduced-Port Kerotest Polyball Valve
- 42 = 2" Balon Steel Valve

NINE = LID**COLOR**

(Silver is Standard)

A = Yellow

B = Blue

J = Black

TEN = VENT HOLE

C = One 3/8" Vent

Hole

ELEVEN = MAGNET

(One Magnet Located in the Flange is Standard)

D = No Magnet (Heavy Duty Boxes are not supplied with a magnet.)

FOR OTHER OPTIONS OR VARIATIONS, PLEASE CONSULT THE FACTORY.



6 INCH VALVE BOX WITH A 9 INCH BELL

- The slip-type design protects the service from downward pressure. The box absorbs the pressure from above.
- Meets DOT requirement 192.181; "If the valve is installed in a buried box, the box must be installed so as to avoid transmitting external loads to the main."
- Easily adjusts to grade level. No need to dig when grade changes, just step-on it to push down, or pry it up.
- A full throat/unobstructed upper tube, allows more room to operate the key.
- Made from SUPERIOR GRADE ABS plastic. It's long lasting and won't rust, rot or corrode.
- Light weight and easy to handle.
- 6" I.D. upper tube with a 9" I.D. bell.
- Fits up to 4" plastic valves. The closed bell gives flexibility for use on many steel valves.
- Molded with 2¾", 4" and 6" cut away arches for use with any compatible valve.
- Use with any compatible Handley valve support for the ideal installation.
- Single or multi-slotting is available for use with compatible Handley valve supports.
- 1½" cast iron flange is standard for off-road installations.
- 5" cast iron heavy-duty flange is available for in road installations.
- Choose from locking or drop-in lids marked GAS, WATER, or SEWER.
- Lids are available with or without vent holes.
- 1½" stackable risers, that utilize the same lid, are available when the road is repaved.
- Extensions available.
- Tracer wire holes can be provided upon request.
- Customized lids are available for an additional charge.



This page is intentionally blank to accommodate dual sided printing.



HANDLEY INDUSTRIES, INC.

HOW TO ORDER SUPERIOR GRADE 6" VALVE BOXES WITH A 9" BELL

Choose from the following categories to build the valve box best suited to your personal needs. Many options are available so please look this over closely, we don't want you to miss a thing!

ONE = LID LETTERING G = Gas S = Sewer W = Water	TWO = BOX SIZE 6 = 6"	THREE = BOX TYPE V = Valve Box H = Heavy Duty Box	FOUR = ARCH A = Yes N = No
FIVE = LOWER TUBE DESIGN B = 9" Bell			
SIX = ADJUSTABLE RANGE (Measured from top of the box to the bottom of the box. Make your selection from the group that matches your Box Type for Category Three.)			
VALVE BOXES 2 = 24" - 30" 3 = 29" - 42" 4 = 37" - 54" 5 = 41" - 66"		HEAVY DUTY BOXES 2 = 26" - 32" 3 = 31" - 44" 4 = 39" - 56" 5 = 43" - 68"	
SEVEN = LID TYPE (Locking Lid is Standard) N = Non-Locking			



EIGHT = SUPPORT SYSTEM MODIFICATION

If you are using a support with your Valve Box, one of the codes below is required:

Consult the **HANDLEY VALVE AND BOX SUPPORT** page for additional options or if you require a **BELL PLATE VALVE BOX** please, refer to that page.

CODES	VALVE APPLICATION
06 =	3" Full-Port Kerotest Polyball Valve
06 =	3" Full-Port Lyall-Polytec Ball Valve
06 =	3" Full-Port Nordstrom Poly Ball Valve
06 =	4" Reduced-Port Kerotest Polyball Valve
06 =	4" Reduced-Port Nordstrom Poly Ball Valve
06 =	4" Standard-Port Lyall-Polytec Ball Valve
19 =	2" Kerotest Poly Plug Valve
20 =	4" Kerotest Poly Plug Valve
25 =	2" Perfection Plug Valve (old) - (see VV33)
28 =	3" Kerotest Poly Plug Valve
29 =	2" Frialen-Friatec Poly Ball Valve
30 =	3", 4" Frialen-Friatec Poly Ball Valves

NINE = LID COLOR

(Silver is Standard)

A = Yellow

B = Blue

J = Black

TEN = VENT HOLE

C = One 3/8" Vent Hole

ELEVEN = MAGNET

(One Magnet Located in the Flange is Standard)

D = No Magnet (Heavy Duty Boxes are not supplied with a magnet.)

FOR OTHER OPTIONS OR VARIATIONS, PLEASE CONSULT THE FACTORY.



6 INCH VALVE BOX WITH A 12 INCH BELL

- The slip-type design protects the service from downward pressure. The box absorbs the pressure from above.
- Meets DOT requirement 192.181; "If the valve is installed in a buried box, the box must be installed so as to avoid transmitting external loads to the main."
- Easily adjusts to grade level. No need to dig when grade changes, just step-on it to push down, or pry it up.
- A full throat/unobstructed upper tube, allows more room to operate the key.
- Made from SUPERIOR GRADE ABS plastic. It's long lasting and won't rust, rot or corrode.
- Light weight and easy to handle.
- 6" I.D. upper tube with a 12" I.D. bell.
- Fits 6" plastic valves. The closed bell gives flexibility for use on many steel valves.
- 1 ½" cast iron flange is standard for off-road installations.
- 5" Cast iron heavy-duty flange is available for in-road installations.
- Choose from locking or drop-in lids marked GAS, WATER, or SEWER.
- Lids are available with or without vent holes.
- Various arch sizes available.
- 1 ½" stackable risers, that utilize the same lid, are available when the road is repaved.
- Extensions available.
- Tracer wire holes can be provided upon request.
- Customized lids are available for an additional charge.
- Use with a Handley valve support for the ideal installation.



This page is intentionally blank to accommodate dual sided printing.



HANDLEY INDUSTRIES, INC.

HOW TO ORDER SUPERIOR GRADE 6" VALVE BOXES WITH A 12" BELL

Choose from the following categories to build the valve box best suited to your personal needs. Many options are available so please look this over closely, we don't want you to miss a thing!

ONE = LID LETTERING G = Gas S = Sewer W = Water	TWO = BOX SIZE 6 = 6"	THREE = BOX TYPE V = Valve Box H = Heavy Duty Box	FOUR = ARCH A = Yes N = No		
FIVE = LOWER TUBE DESIGN X = 12" Bell					
SIX = ADJUSTABLE RANGE (Measured from top of the box to the bottom of the box. Make your selection from the group that matches your Box Type for Category Three.) <table border="0" data-bbox="183 968 1433 1125"> <tr> <td data-bbox="183 968 812 1125"> VALVE BOXES 2 = 26" - 31" 3 = 32" - 44-1/2" 4 = 41" - 57-1/2" 5 = 54" - 78-5/8" </td> <td data-bbox="812 968 1433 1125"> HEAVY DUTY BOXES 2 = 28" - 33" 3 = 34" - 46-1/2" 4 = 43" - 59-1/2" 5 = 56" - 80-5/8" </td> </tr> </table>				VALVE BOXES 2 = 26" - 31" 3 = 32" - 44-1/2" 4 = 41" - 57-1/2" 5 = 54" - 78-5/8"	HEAVY DUTY BOXES 2 = 28" - 33" 3 = 34" - 46-1/2" 4 = 43" - 59-1/2" 5 = 56" - 80-5/8"
VALVE BOXES 2 = 26" - 31" 3 = 32" - 44-1/2" 4 = 41" - 57-1/2" 5 = 54" - 78-5/8"	HEAVY DUTY BOXES 2 = 28" - 33" 3 = 34" - 46-1/2" 4 = 43" - 59-1/2" 5 = 56" - 80-5/8"				
SEVEN = LID TYPE (Locking Lid is Standard) N = Non-Locking					



EIGHT = SUPPORT SYSTEM MODIFICATION

If you are using a support with your Valve Box, one of the codes below is required:

Consult the **HANDLEY VALVE AND BOX SUPPORT** page for additional options or if you require a **BELL PLATE VALVE BOX** please, refer to that page. (BPA = Bell Plate Available)

CODES VALVE APPLICATION

- 17 = 4" Full-Port Kerotest Polyball Valve - (BPA)
- 17 = 4" Full-Port Lyall-Polytec Ball Valve - (BPA)
- 17 = 4" Full-Port Nordstrom Poly Ball Valve - (BPA)
- 17 = 6" Reduced-Port Kerotest Polyball Valve - (BPA)
- 17 = 6" Reduced-Port Nordstrom Poly Ball Valve - (BPA)
- 17 = 6" Standard-Port Lyall-Polytec Ball Valve - (BPA)
- 27 = 4x3" Full-Port Perfection Ball Valve - (BPA)
- 27 = 4x4" Full-Port Perfection Ball Valve - (BPA)
- 27 = 4x6" Reduced-Port Perfection Ball Valve - (BPA)
- 31 = 6", 8" Frialen-Friatec Poly Ball Valves - (BPA)
- 40 = 6" Full-Port Kerotest Polyball Valve - (BPA)
- 40 = 6" Full-Port Lyall-Polytec Ball Valve - (BPA)
- 40 = 6" Full-Port Nordstrom Poly Ball Valve - (BPA)
- 40 = 8" Reduced-Port Kerotest Polyball Valve - (BPA)
- 40 = 8" Reduced-Port Nordstrom Poly Ball Valve - (BPA)
- 40 = 8" Standard-Port Lyall-Polytec Ball Valve - (BPA)

NINE = LID COLOR

(Silver is Standard)

- A = Yellow
- B = Blue
- J = Black

TEN = VENT HOLE

C = One 3/8" Vent Hole

ELEVEN = MAGNET

(One Magnet Located in the Flange is Standard)

D = No Magnet (Heavy Duty Boxes are not supplied with a magnet.)

FOR OTHER OPTIONS OR VARIATIONS, PLEASE CONSULT THE FACTORY.



HOW TO ORDER SUPERIOR GRADE 6" VALVE BOX PARTS AND ACCESSORIES 'S', 'B' & 'X' MODELS

<u>PENTAGON WRENCH</u> = PW	<u>EXTENSIONS</u> = XTG6 & One Code AL = 18"	<u>RISERS</u> (Raises Box 1½" Stackable) RIG6 (Used on Heavy Duty Locking Lid) RIG6N (Used on Heavy Duty Non-Locking Lid)															
<u>REPLACEMENT LIDS</u> = LI & One Code from the Following Categories:																	
ONE = LETTERING G = Gas S = Sewer W = Water D = Drip	TWO = SIZE 6 = 6"	THREE = BOX TYPE V = Valve Box H = Heavy Duty															
FOUR = LID TYPE (Locking is Standard) N = Non-Locking																	
<u>FIVE = COLOR</u> (Silver is Standard) A = Yellow B = Blue J = Black	<u>SIX = VENT HOLE</u> C = One 3/8" Vent Hole																
<u>REPLACEMENT UPPER TUBES</u> = UTG6 & One Code from the Following Categories:																	
ONE = BOX TYPE V = Valve Box H = Heavy Duty	TWO = LENGTH A = 10" (2' Box) B = 17½" (3' Box) C = 21½" (4' Box) D = 29½" (5' Box)	THREE = FLANGE (Omit Code on UL) (Locking is Standard) N = Non-Locking															
FOUR = MAGNET (One Magnet Located in the Flange is Standard) D = No Magnet (Heavy Duty Boxes are not supplied with a magnet.)																	
<u>REPLACEMENT UPPER TUBE & LID ASSEMBLIES</u> - All assemblies begin with UL. Repeat all the steps beginning with Group One for REPLACEMENT LIDS and REPLACEMENT UPPER TUBES .																	
<u>REPLACEMENT LOWER TUBES</u> = LTG6 & One Code from the Following Categories:																	
ONE = ARCH A = Yes N = No	TWO = BELL DESIGN S = 6" Straight Bell B = 9" Bell X = 12" Bell	THREE = LENGTH ACCORDING TO THE BELL DESIGN															
<table style="width: 100%; border: none;"> <thead> <tr> <th style="text-align: center;">CODE(S)</th> <th style="text-align: center;">CODE(B)</th> <th style="text-align: center;">CODE(X)</th> </tr> </thead> <tbody> <tr> <td>A = 23½" (2' Box)</td> <td>A = 22⅝" (2' Box)</td> <td>A = 25" (2' Box)</td> </tr> <tr> <td>B = 28" (3' Box)</td> <td>B = 27⅞" (3' Box)</td> <td>B = 31" (3' Box)</td> </tr> <tr> <td>C = 36" (4' Box)</td> <td>C = 35⅞" (4' Box)</td> <td>C = 40" (4' Box)</td> </tr> <tr> <td>D = 40" (5' Box)</td> <td>D = 39⅞" (5' Box)</td> <td>D = 53" (5' Box)</td> </tr> </tbody> </table>			CODE(S)	CODE(B)	CODE(X)	A = 23½" (2' Box)	A = 22⅝" (2' Box)	A = 25" (2' Box)	B = 28" (3' Box)	B = 27⅞" (3' Box)	B = 31" (3' Box)	C = 36" (4' Box)	C = 35⅞" (4' Box)	C = 40" (4' Box)	D = 40" (5' Box)	D = 39⅞" (5' Box)	D = 53" (5' Box)
CODE(S)	CODE(B)	CODE(X)															
A = 23½" (2' Box)	A = 22⅝" (2' Box)	A = 25" (2' Box)															
B = 28" (3' Box)	B = 27⅞" (3' Box)	B = 31" (3' Box)															
C = 36" (4' Box)	C = 35⅞" (4' Box)	C = 40" (4' Box)															
D = 40" (5' Box)	D = 39⅞" (5' Box)	D = 53" (5' Box)															



FOUR = SUPPORT SYSTEM MODIFICATION


If you are using a support with your Valve Box, one of the codes below is required:

Consult the **HANDLEY VALVE AND BOX SUPPORT** page for additional options or if you require a **BELL PLATE VALVE BOX** please, refer to that page. (BPA = Bell Plate Available)

CODES	VALVE APPLICATION	BELL DESIGN
05 =	3" Standard-Port Lyall-Polytec Ball Valve	S & B & X
05 =	2" Full-Port Lyall-Polytec Ball Valve	S & B & X
05 =	2" Full-Port Kerotest Polyball Valve	S & B & X
05 =	2" Full-Port Nordstrom Poly Ball Valve	S & B & X
05 =	3" Reduced-Port Kerotest Polyball Valve	S & B & X
05 =	3" Reduced-Port Nordstrom Poly Ball Valve	S & B & X
06 =	3" Full-Port Lyall-Polytec Ball Valve	B & X
06 =	4" Reduced-Port Kerotest Polyball Valve	B & X
06 =	3" Full-Port Nordstrom Poly Ball Valve	B & X
06 =	4" Standard-Port Lyall-Polytec Ball Valve	B & X
06 =	3" Full-Port Kerotest Polyball Valve	B & X
06 =	4" Reduced-Port Nordstrom Poly Ball Valve	B & X
08 =	2", 3" Kerotest Poly Butterfly Valves	S & B & X
11 =	2" Dresser GTO-Coated & Uncoated Valve	S & B & X
17 =	4" Full-Port Nordstrom Poly Ball Valve - (BPA)	X Only
17 =	6" Reduced-Port Kerotest Polyball Valve - (BPA)	X Only
17 =	6" Reduced-Port Nordstrom Poly Ball Valve - (BPA)	X Only
17 =	4" Full-Port Kerotest Polyball Valve - (BPA)	X Only
17 =	4" Full-Port Lyall-Polytec Ball Valve - (BPA)	X Only
17 =	6" Standard-Port Lyall-Polytec Ball Valve - (BPA)	X Only
19 =	2" Kerotest Poly Plug Valve	B & X
20 =	4" Kerotest Poly Plug Valve	B & X
24 =	2" Reduced-Port Nordstrom Poly II Ball Valve	S & B & X
25 =	2" Perfection Plug Valve (old) - (see VV33)	B & X
26 =	2" Handley Plastic Ball Valve	S & B & X
27 =	4x6" Reduced-Port Perfection Ball Valve - (BPA)	X Only
27 =	4x3" Full-Port Perfection Ball Valve - (BPA)	X Only
27 =	4x4" Full-Port Perfection Ball Valve - (BPA)	X Only
28 =	3" Kerotest Poly Plug Valve	B & X
29 =	2" Frialen-Friatec Poly Ball Valve	B & X
30 =	3", 4" Frialen-Friatec Poly Ball Valves	B & X
31 =	6", 8" Frialen-Friatec Poly Ball Valves - (BPA)	X Only
33 =	2" Perfection Modified Poly Ball Valve (new) - (see VV25)	S & B & X
40 =	6" Full-Port Nordstrom Poly Ball Valve - (BPA)	X Only
40 =	6" Full-Port Kerotest Polyball Valve - (BPA)	X Only
40 =	8" Standard-Port Lyall-Polytec Ball Valve - (BPA)	X Only
40 =	8" Reduced-Port Nordstrom Poly Ball Valve - (BPA)	X Only
40 =	8" Reduced-Port Kerotest Polyball Valve - (BPA)	X Only
40 =	6" Full-Port Lyall-Polytec Ball Valve - (BPA)	X Only
41 =	1 1/4", 1 1/2" Full-Port Kerotest Polyball Valves	S & B & X
41 =	2" Reduced-Port Kerotest Polyball Valve	S & B & X
42 =	2" Balon Steel Valve	S & B & X

FOR OTHER OPTIONS OR VARIATIONS, PLEASE CONSULT THE FACTORY.

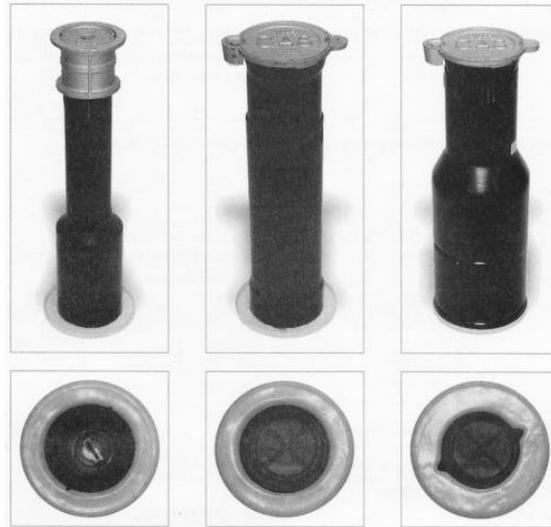

BELL PLATE VALVE BOXES

- The slip-type design protects the service from downward pressure. The box absorbs the pressure from above.
- Meets DOT requirement 192.181; "If the valve is installed in a buried box, the box must be installed so as to avoid transmitting external loads to the main."
- Valve Box sits on dirt, not the valve.
- Easily adjusts to grade level. No need to dig when grade changes. Just push down or pry up.
- A full throat/unobstructed upper tube, allows more room to operate the key.
- Made from SUPERIOR GRADE ABS plastic. It's long lasting and won't rust, rot or corrode.
- The boxes have a 4" or 6" upper tube and a 6" or 9" bell area.
- See "How to Order Bell Plate Valve Boxes" for a list of valves that these valve boxes will fit.
- 1½" cast iron flange is STANDARD for off-road installations.
- 5" cast iron heavy duty flange is standard for in-road installations.
- Choose from locking or non-locking lids marked GAS, WATER or SEWER.
- Lids are available with or without vent holes.
- Extensions are available.
- Customized lids are available for an additional charge.
- Light weight and easy to handle.
- 1½" stackable risers, that utilize the same lid, are available when the road is repaved.

This page is intentionally blank to accommodate dual sided printing.



HANDLEY INDUSTRIES, INC.

HOW TO ORDER SUPERIOR GRADE BELL PLATE VALVE BOXES

Choose from the following categories to build the valve box best suited to your personal needs. Many options are available so please look this over closely, we don't want you to miss a thing!

ONE = LID LETTERING G = Gas S = Sewer W = Water	TWO = BOX SIZE 4 = 4" 6 = 6"	THREE = BOX TYPE V = Valve Box H = Heavy Duty Box	FOUR = ARCH N = No																								
FIVE = LOWER TUBE DESIGN (Skip GROUP FIVE if using GROUP TWO - CODE 4) S = 6" Straight Bell B = 9" Bell																											
SIX = ADJUSTABLE RANGE (Measured from top of the box to the bottom of the box. Make your selection from the group that matches your Box Type for Category Three.) <table border="0" style="width: 100%; margin-top: 10px;"> <thead> <tr> <th colspan="2" style="text-align: center;">VALVE BOXES</th> <th colspan="2" style="text-align: center;">HEAVY DUTY BOXES</th> </tr> <tr> <th style="text-align: left;">4" CODES</th> <th style="text-align: left;">6" CODES</th> <th style="text-align: left;">4" CODES</th> <th style="text-align: left;">6" CODES</th> </tr> </thead> <tbody> <tr> <td>2 = 24" - 30"</td> <td>2 = 24" - 30"</td> <td>2 = 26" - 32"</td> <td>2 = 26" - 32"</td> </tr> <tr> <td>3 = 30" - 42"</td> <td>3 = 29" - 42"</td> <td>3 = 32" - 44"</td> <td>3 = 31" - 44"</td> </tr> <tr> <td>4 = 42" - 54"</td> <td>4 = 37" - 54"</td> <td>4 = 44" - 56"</td> <td>4 = 39" - 56"</td> </tr> <tr> <td>5 = 54" - 66"</td> <td>5 = 41" - 66"</td> <td>5 = 56" - 68"</td> <td>5 = 43" - 68"</td> </tr> </tbody> </table>				VALVE BOXES		HEAVY DUTY BOXES		4" CODES	6" CODES	4" CODES	6" CODES	2 = 24" - 30"	2 = 24" - 30"	2 = 26" - 32"	2 = 26" - 32"	3 = 30" - 42"	3 = 29" - 42"	3 = 32" - 44"	3 = 31" - 44"	4 = 42" - 54"	4 = 37" - 54"	4 = 44" - 56"	4 = 39" - 56"	5 = 54" - 66"	5 = 41" - 66"	5 = 56" - 68"	5 = 43" - 68"
VALVE BOXES		HEAVY DUTY BOXES																									
4" CODES	6" CODES	4" CODES	6" CODES																								
2 = 24" - 30"	2 = 24" - 30"	2 = 26" - 32"	2 = 26" - 32"																								
3 = 30" - 42"	3 = 29" - 42"	3 = 32" - 44"	3 = 31" - 44"																								
4 = 42" - 54"	4 = 37" - 54"	4 = 44" - 56"	4 = 39" - 56"																								
5 = 54" - 66"	5 = 41" - 66"	5 = 56" - 68"	5 = 43" - 68"																								
SEVEN = LID TYPE (Locking Lid is Standard) N = Non-Locking																											



EIGHT = BELL PLATE CODE

P1 = (Compatible with the valves listed below)

- 4" Full-Port Kerotest Polyball Valve - (VV17)
- 4" Full-Port Lyall-Polytec Ball Valve - (VV17)
- 4" Full-Port Nordstrom Poly Ball Valve - (VV17)
- 4x3" Full-Port Perfection Ball Valve - (VV27)
- 4x4" Full-Port Perfection Ball Valve - (VV27)
- 4x6" Reduced-Port Perfection Ball Valve - (VV27)
- 6" Reduced-Port Kerotest Polyball Valve - (VV17)
- 6" Reduced-Port Nordstrom Poly Ball Valve - (VV17)
- 6" Standard-Port Lyall-Polytec Ball Valve - (VV17)
- 6" Full-Port Kerotest Polyball Valve - (VV40)
- 6" Full-Port Lyall-Polytec Ball Valve - (VV40)
- 6" Full-Port Nordstrom Poly Ball Valve - (VV40)
- 6", 8" Frialen-Friatec Poly Ball Valves
- 6x6" Full-Port Perfection Ball Valve
- 6x8" Reduced-Port Perfection Ball Valve
- 8" Reduced-Port Kerotest Polyball Valve - (VV40)
- 8" Reduced-Port Nordstrom Poly Ball Valve - (VV40)
- 8" Standard-Port Lyall-Polytec Ball Valve - (VV40)
- 8" Full-Port Kerotest Polyball Valve
- 8" Full-Port Lyall-Polytec Ball Valve
- 8" Full-Port Nordstrom Poly Ball Valve (w/Turning Head only)
- 10" Reduced-Port Kerotest Polyball Valve
- 10" Standard-Port Lyall-Polytec Ball Valve
- 12" Reduced-Port Kerotest Polyball Valve
- 12" Standard-Port Lyall-Polytec Ball Valve

NINE = LID**COLOR**

(Silver is Standard)

A = Yellow

B = Blue

J = Black

TEN = VENT HOLEC = One 3/8" Vent
Hole**ELEVEN = MAGNET**

(One Magnet Located in the Flange is Standard)

D = No Magnet (Heavy Duty Boxes are not supplied with a magnet.)

FOR OTHER OPTIONS OR VARIATIONS, PLEASE CONSULT THE FACTORY.



HOW TO ORDER SUPERIOR GRADE BELL PLATE VALVE BOX PARTS AND ACCESSORIES

**PENTAGON
WRENCH****CODE** = PW**EXTENSIONS (4") = XTG4 & ONE
CODE**

AL = 18" BL=35 5/8"

**EXTENSIONS (6") = XTG6 & ONE
CODE**

AL=18"

**RISERS = RAISES BOX 1 1/2" - STACKABLE
RIG4** (Compatible with All 4" Valve Boxes)**RIG6** (Used on 6" Heavy Duty Locking Lid)**RIG6N** (Used on 6" Heavy Duty Non-Locking Lid)**REPLACEMENT LIDS****LI & One Code from the Following Categories:**

ONE = LETTERING TWO = SIZE THREE = BOX TYPE FOUR = LID TYPE FIVE = COLOR SIX = VENT HOLE
 G = Gas 4 = 4" (Omit Code on 4" Lids) (Locking is Standard) (Silver is Standard) C = One 3/8"
 S = Sewer 6 = 6" V = Valve Box N = Non-Locking A = Yellow Vent Hole
 W = Water H = Heavy Duty B = Blue J = Black

REPLACEMENT UPPER TUBES**4" Models Begin with UTG4 & One Code from the Following Categories:****6" Models Begin with UTG6 & One Code from the Following Categories:**

ONE = BOX TYPE	TWO = LENGTH	THREE = FLANGE	FOUR = MAGNET
V = Valve Box	CODE (4")	(Omit Code on UL	(One Magnet Located in the Flange
H = Heavy Duty	A = 12" (2' Box)	A = 10" (2' Box)	is Standard)
	B = 17 1/2" (3' Box)	B = 17 1/2" (3' Box)	D = No Magnet
	C = 29 1/2" (4' Box)	C = 21 1/2" (4' Box)	(Heavy Duty Boxes are not supplied
	D = 42" (5' Box)	D = 29 1/2" (5' Box)	with a magnet.)

REPLACEMENT UPPER TUBE & LID ASSEMBLIES - All Assemblies begin with **UL**. Repeat all the steps beginning with Group One for [REPLACEMENT LIDS](#) and [REPLACEMENT UPPER TUBES](#).

REPLACEMENT LOWER TUBES**4" Models Begin with LTG4N & One Code from the Following Categories:****6" Models Begin with LTG6N & One Code from the Following Categories:**

ONE = BELL DESIGN	TWO = LENGTH ACCORDING TO THE BELL DESIGN		
(Omit Code on 4" Models)	CODE (4")	CODE (S)	CODE (B)
S = 6" Straight Bell	A = 27 1/8" (3', 4', 5' Box)	A = 23 1/2" (2' Box)	A = 22 5/8" (2' Box)
B = 9" Bell	B = 20 3/4" (2' Box)	B = 28" (3' Box)	B = 27 1/8" (3' Box)
		C = 35 1/8" (4' Box)	C = 35 1/8" (4' Box)
		D = 39 1/8" (5' Box)	D = 39 1/8" (5' Box)



THREE = BELL PLATE CODE

P1 = (Compatible with the valves listed below)

- 4" Full-Port Kerotest Polyball Valve - (VV17)
- 4" Full-Port Lyall-Polytec Ball Valve - (VV17)
- 4" Full-Port Nordstrom Poly Ball Valve - (VV17)
- 4x3" Full-Port Perfection Ball Valve - (VV27)
- 4x4" Full-Port Perfection Ball Valve - (VV27)
- 4x6" Reduced-Port Perfection Ball Valve - (VV27)
- 6" Reduced-Port Kerotest Polyball Valve - (VV17)
- 6" Reduced-Port Nordstrom Poly Ball Valve - (VV17)
- 6" Standard-Port Lyall-Polytec Ball Valve - (VV17)
- 6" Full-Port Kerotest Polyball Valve - (VV40)
- 6" Full-Port Lyall-Polytec Ball Valve - (VV40)
- 6" Full-Port Nordstrom Poly Ball Valve - (VV40)
- 6", 8" Frialen-Friatec Poly Ball Valves
- 6x6" Full-Port Perfection Ball Valve
- 6x8" Reduced-Port Perfection Ball Valve
- 8" Reduced-Port Kerotest Polyball Valve - (VV40)
- 8" Reduced-Port Nordstrom Poly Ball Valve - (VV40)
- 8" Standard-Port Lyall-Polytec Ball Valve - (VV40)
- 8" Full-Port Kerotest Polyball Valve
- 8" Full-Port Lyall-Polytec Ball Valve
- 8" Full-Port Nordstrom Poly Ball Valve (w/Turning Head only)
- 10" Reduced-Port Kerotest Polyball Valve
- 10" Standard-Port Lyall-Polytec Ball Valve
- 12" Reduced-Port Kerotest Polyball Valve
- 12" Standard-Port Lyall-Polytec Ball Valve

FOR OTHER OPTIONS OR VARIATIONS, PLEASE CONSULT THE FACTORY.

